


# Nail Strip Profile NS

## Dimensions & Specifications

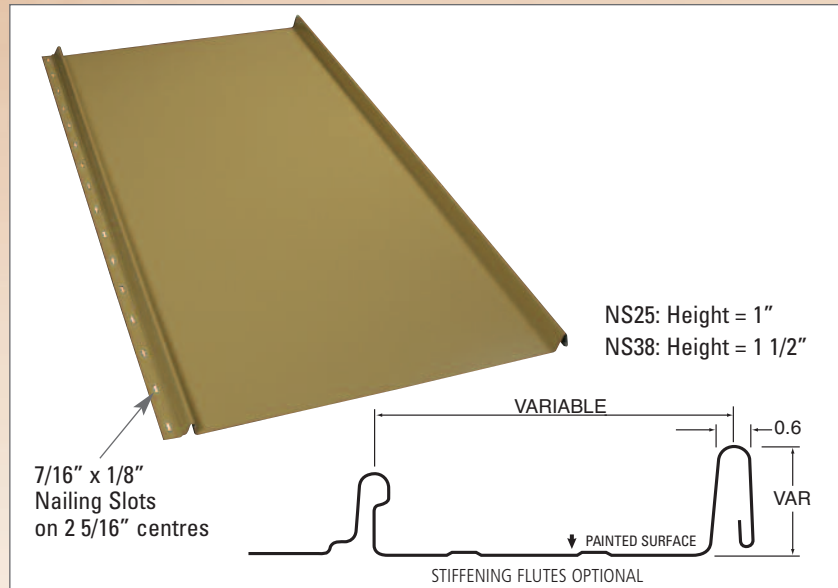

### FEATURES:

- No exposed fasteners
- Ease of installation
- Full range of stock colours
- Variable width
- Optional stiffening flutes
- Continuous nail strip
- No seamer required

### OIL CANNING:

- **Oil canning is a naturally occurring phenomenon inherent in all sheet steel. Oil canning is not a valid reason for rejection of these products**


### INSTALLATION:

- Single skin application
- Recommended that this always be **applied over solid substrate**
- Recommended that this be applied over waterproof membrane
- Fasteners at maximum 2' centres
- Snap-in-place design

### STANDARD PANEL WIDTHS:

	NS25	NS38
26/24 ga.	19.56"	18.56"

### SIDE LAP DETAIL:

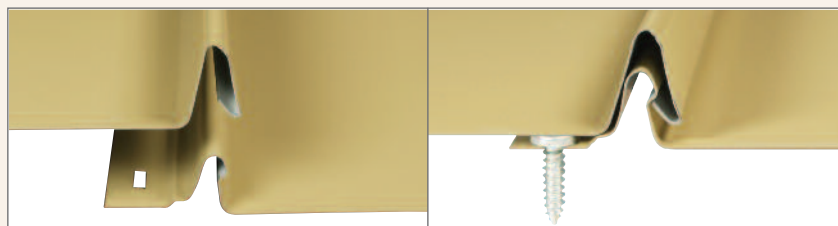

# Nail Strip Profile NS




NS38 Charcoal



NS38 Bright Red

## Overlap Construction

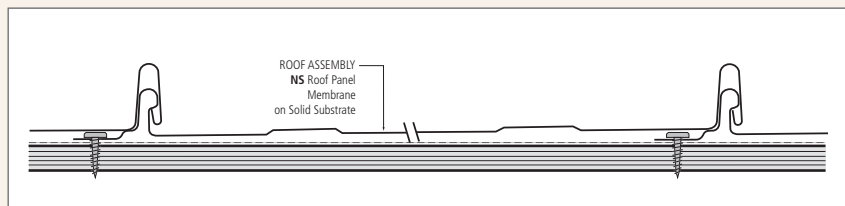

## Panel Specifications

	Min./Max. Slope	Min./Max. Material Thickness	Min./Max.* Sheet Length	Min./Max. Panel Width
NS25:	3/12 - 12/12	0.018 - 0.024 in.	2'-6" - 45'	10" - 28"
NS38:	1.5/12 - 12/12	0.018 - 0.024 in.	2'-6" - 45'	10" - 28"

\*NOTE: Longer sheets are available on request. Additional charges may apply.

