


# Trusscore PVC Panels

## Trusscore PVC Wall and Ceiling Panel



### FEATURES:

- Polyvinyl Chloride Panel
- Class A Fire Rating per ASTM E-84 (Flame spread = 25)
- CFIA Approved for walls and ceilings
- Meets and exceeds Hygienic Construction codes
- Bright smooth finish
- Limited Lifetime Warranty - made in Canada
- Corrosion resistant
- Hidden fastener design
- Pre-punched nailing flange
- Inner truss design for spanning strength
- Tight fitting Tongue and Groove design

### APPLICATIONS:

Agricultural, Industrial, Commercial and Residential  
Interior Wall and Ceiling Liner  
Health Care Facilities, Food Processing Plants, Schools,  
Car Washes, Kennels, Riding Stables

### SHEET SIZES:



16" coverage x 10', 12', 16' and 20'. Custom lengths available

### INSTALLATION:

Hidden fastener design. Do not fasten through face of panel.  
Do not fasten tightly - allow 1/16" clear under head of fasteners

### ACCESSORIES:

#10 x 1" Pancake Type A Screw, no washer  
#8 x 3/4" Pancake Screw c/w nylon washer  
Siliconized interior acrylic latex sealant

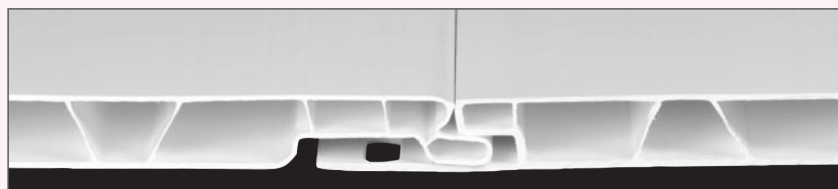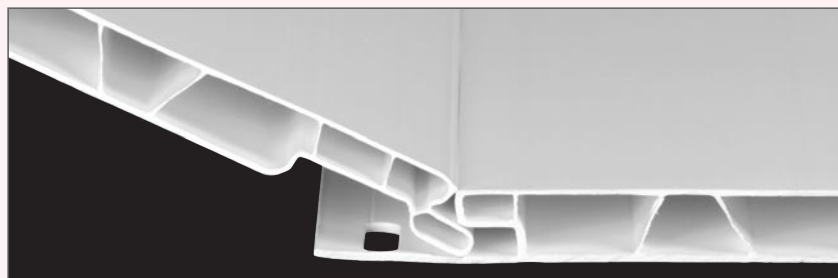


All Trims in 10' lengths

|                           |                                |                                  |                        |
|---------------------------|--------------------------------|----------------------------------|------------------------|
| <b>J-TRIM</b><br>         | <b>H-DIVIDER</b><br>           | <b>BASE TRIM</b><br>             |                        |
| <b>OUTSIDE CORNER</b><br> | <b>WIDE OUTSIDE CORNER</b><br> | <b>INSIDE-OUTSIDE CORNER</b><br> | <b>INSIDE COVE</b><br> |
| SPECIAL ORDER             |                                |                                  |                        |



# Ribcore PVC Liner Panels

## Ribcore 3" PVC Liner Panels & Trims

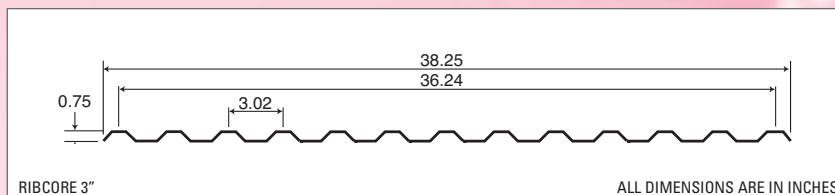

### FEATURES:

- White Polyvinyl Chloride Panel
- Government-Accepted for Food Production areas (#3100-3/R134)
- Bright high gloss finish
- Superior light reflection
- Easily cleaned - pressure wash
- Cuts easily with hand or power saws
- Ribcore 3" is a reversible profile

### APPLICATIONS:

Wall/Ceiling Liner, Agricultural Confinement areas, Industrial/Commercial buildings

### SHEET SIZES:

38.25" x 12'-2", 14'-2", 16'-4", 20'-4" Coverage: 36.24" x 12', 14', 16'-4", 20'-4"  
Material Thickness: 0.79 mm (0.031")

### STORAGE:

Acclimate panels for 24 hours prior to installation

### INSTALLATION:

Pre-drill holes 1/8" larger than screws. Fasten on 24" centres. If product is installed on 24" centres, there are no special requirements for spacing of fasteners.

NOTE: When installed on ceilings in livestock barns with mechanical ventilation, the ribs must run parallel to the airflow, otherwise turbulence will prevent proper ventilation.

### ACCESSORIES:

#8 x 3/4" White Stainless Type A Robertson Panhead Screws, no washers.  
#8 x 1-1/2" White Stainless Type A Robertson Panhead Screws, no washers.  
#10 x 1" White Nylon Type AB Screws, with or without washers.  
Foam Closure Strip w/adhesive on one side.



### All Trims in 12' lengths

| I/O CORNER | J-TRIM | H-CHANNEL | BASE TRIM |
|------------|--------|-----------|-----------|
|            |        |           |           |

