


## V-Rib Soffit Panels



### FEATURES:

- Custom lengths from 1'-0" to 12'-0"
- Perforated in lengths up to 12'-0"
- Available in 29, 26 and 24 ga.
- Venting available in round or slotted holes
- Stiffener Ribs available in V-Rib or Bubble Rib  
Maximum length: V-Rib: 12' - 0", Bubble Rib: 10' - 0"
- Prepainted Steel, Aluminum, Copper, Stainless Steel and Zinc
- Precut to required length - no field cutting
- Attractive appearance
- Easy installation - secure with screws or nails to underside of overhang

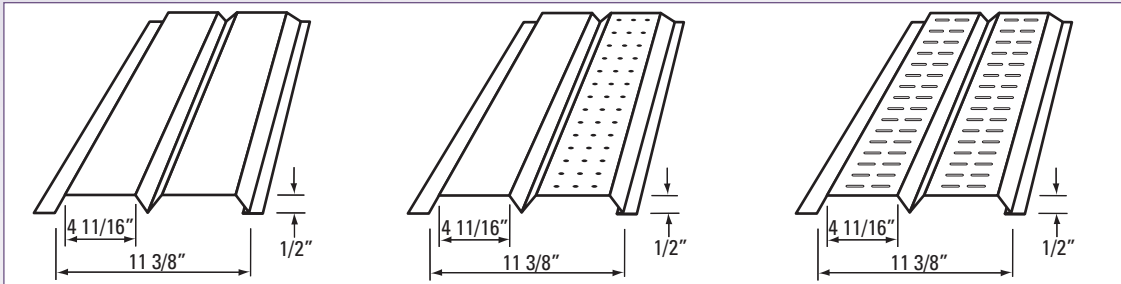


- Plain

- Venting with Holes
- 1/8" dia. holes on 1 1/4" centres
- Holes on one or both sides

- Venting with Slots
- 1/8" slots on 1/2" centres
- One or two rows per side
- Slots on one or both sides

## Vented Soffit CH5-32

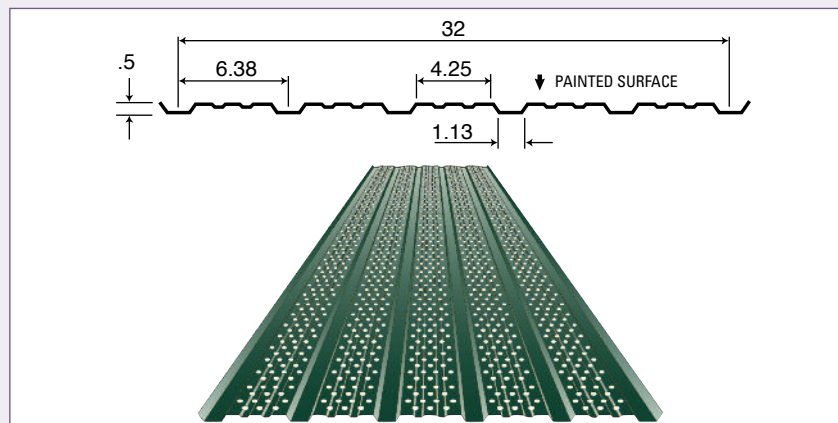


### FEATURES:

- Rollform lengths from 0'-10" to 45'-0"
- Continuously vented on top face 1/8" dia. holes on 3/8" centres
- Stocked in 26 ga. prepainted steel QC18317 White White
- Excellent free air area of 6%



# Soffits

## Agri Soffit Panels

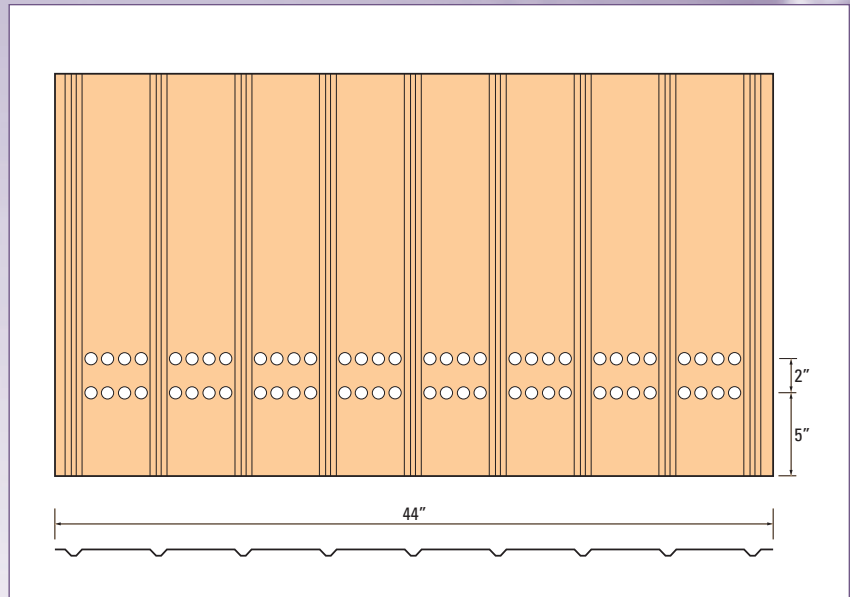

### FEATURES:

- Manufactured from 26 or 29 ga. Prepainted Steel
- Prepainted Steel, Aluminum, Copper, Stainless Steel and Zinc
- Custom lengths up to 10'
- Precut to required length - no field cutting
- Attractive appearance
- Easy installation - secure with screws or nails to underside of overhang

### APPLICATIONS:

- Non-vented: To cover underside of building overhang (soffit)
- Vented: To allow outside air to enter the building and create cross-ventilation
- Venting available in round or slotted holes
- Use in conjunction with roof ventilators

